

CALORPLAST Immersion Type Polymer Heat Exchanger


- where outstanding corrosion resistance matters
- where reliability matters
- where efficiency matters



www.calorplastusa.com


CALORPLAST
USA

APPLICATIONS

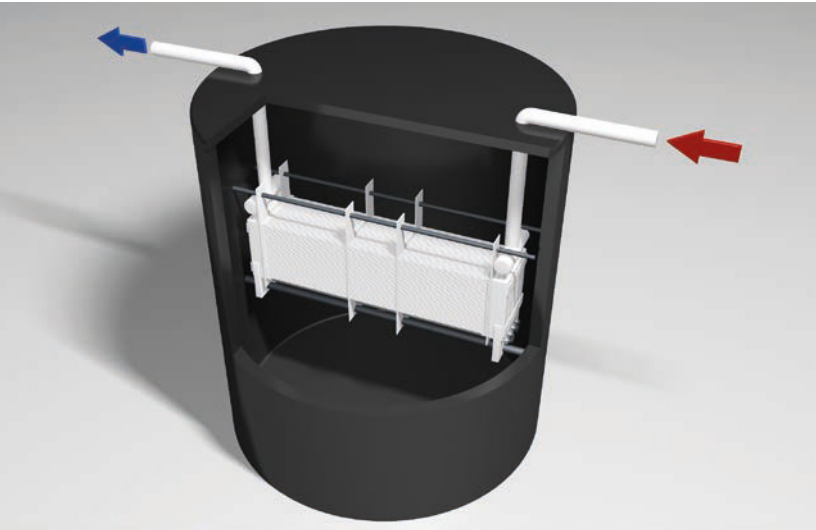

Cooling/heating/condensing

- Heating and cooling of corrosive or scale forming fluids and highly concentrated inorganic acids in open tanks
- Heating, cooling, condensing or evaporation of corrosive media in vessels
- Customized design from modular, pre-manufactured tube sections
- 10 to 5,375 ft² heat transfer surface
- For use with water, steam or cooling media

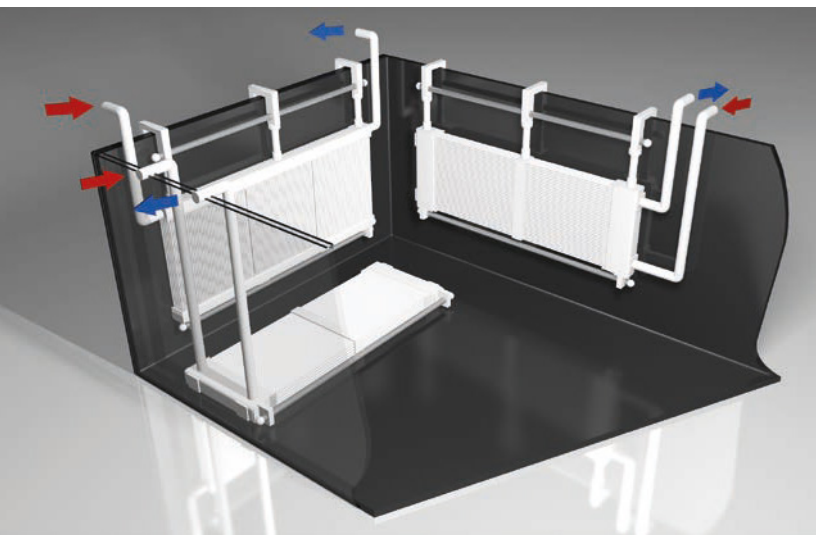

Technical Data

- Materials: PE-RT, PP, PVDF
- Operating temperatures: -22 to +285 °F -30 to +140 °C (dependent on the material chosen)
- Operating pressure: 45 – 230 psi (dependent on material chosen and operating temperature)
- Pressure drop: 0.75 – 7.25 psi (approximately)



BENEFITS

- High cooling and heating efficiency
- Flexible and compact design
- Fully corrosion resistant
- Safe heat transfer medium
- Best in class flow efficiency
- Easy maintenance and cleaning
- More than 30 years of experience




Installed Immersion Type Heat Exchanger in Surface Treatment Process Tank (Decker Anlagebau GmbH)



CALORPLAST USA, LLC

- 1287 US Highway 50 Milford OH 45150
- P 513.576.6333 F 513.576.8733
- Email sales@calorplastusa.com

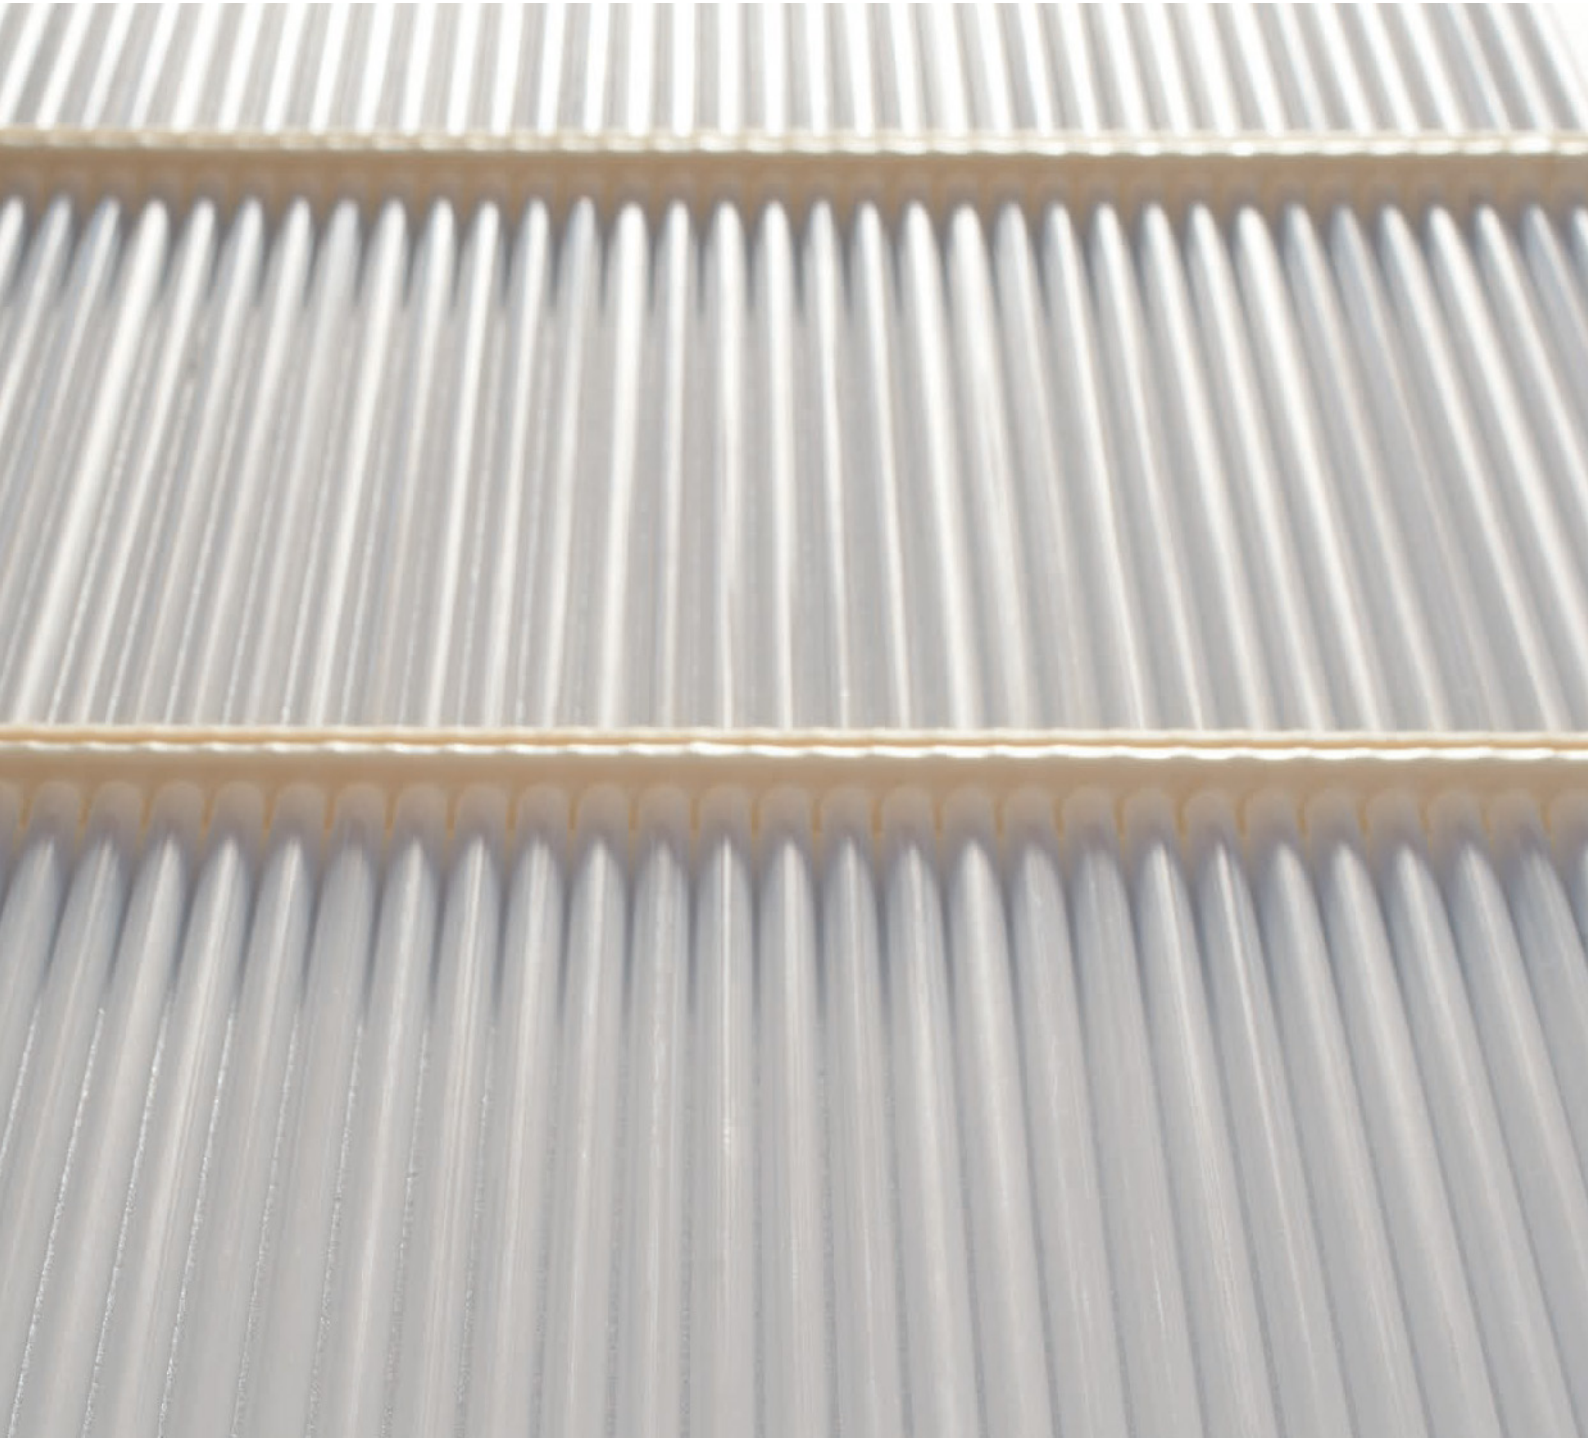

www.calorplastusa.com

CALORPLAST
USA